

TECHNICAL INFORMATION



- SPECIAL FEATURES**
- ✓ High adhesive strength
 - ✓ Water resistant
 - ✓ Good stability

- PRODUCT FEATURES**
- ✓ Non-ageing
 - ✓ Heat-resistant and non-freezing
 - ✓ Easy to apply
 - ✓ Rapid strength development

- SUITABLE SUBSTRATES**
- ✓ STAUF Fillers
 - ✓ Concrete (grippy surface)
 - ✓ Asphalt
 - ✓ Screeds

- SUITABLE UNDERLAYS**
- ✓ Seaming tapes C 140; C 145; C 166; C 230; C 345; C 147

- COLOUR**
- ✓ Green

- REQUIRED QUANTITIES PER RM**
- ✓ depending on substrate

- OPEN TIME**
- ✓ 5 - 15 minutes at 20 °C

- ACCESSIBILITY**
- ✓ After 24 - 48 hours


- SHELF LIFE**
- ✓ 6 months

- GISCODE**
- ✓ RU1 solvent free



CONTACT US TODAY

- ☎ +49 2739 301-0
- 📠 +49 2739 301-200
- ✉ info@stauf.de
- 🌐 www.stauf.de

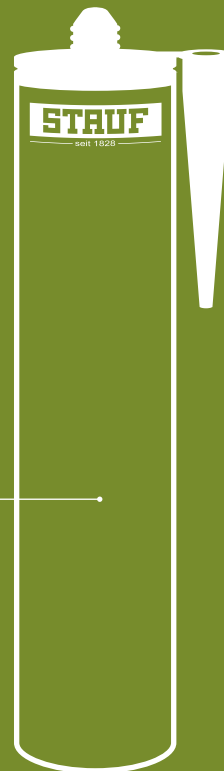

STAUF KLEBSTOFFWERK GMBH

Oberhausener Str. 1 · 57234 Wilnsdorf · Germany

2109/250/EN



SP SPOT TACK

Universal 1-component PU mounting adhesive for synthetic turf and sports facilities



STRAIGHT ON POINT

POINT TAKEN With the STAUF SP SPOT TACK, our universal applicable mounting adhesive, we present the perfect solution for the pinpoint bonding and repairing of sports surfaces. STAUF SP SPOT TACK is water-resistant and our high-speed answer to bondings on numerous different surfaces and materials such as metal, plastic, concrete, screeds and asphalt. Our all-purpose product comes in a cartridge.

Whether you apply STAUF SP SPOT TACK in spots, strips or for full-surface adhesion – you can always count on a quick result, combined with an outstanding stability. In addition, STAUF SP SPOT TACK offers the possibility of an easy adjustment if a correction of position is necessary – spot landing guaranteed.


APPLICATION RANGE

Ideal for high-precision bonding of artificial turf, particularly artificial turf lines, for easy repair of open artificial turf seams and for bonding and repair of resilient and textile floor coverings, sports coverings etc.. Used on numerous different surfaces and materials such as concrete, asphalt, levelling compounds, screeds and synthetic turf seam tapes.

PROCESSING

1. Bonding surfaces must be dry and free of dust and grease.
2. Depending on the material that needs to be installed, apply adhesive in spots, strips or full-spread.
3. Arrange the parts to be mounted. Position can be adjusted if necessary. Press down firmly. Mounted parts should be fastened for approx. 12 h if necessary.

STAUF SUPPLIES



Seaming tapes
C 140; C 145;
C 166; C 230;
C 345; C 147



Applicator
gun

